

## 240W Single Output Switching Power Supply HLG-240H-xx ADM series



#### ■ Features :

- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires
- 7 years warranty (Note.10)

























HLG-240H-12 A

Blank: IP67 rated. Cable for I/O connection.


- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal
- D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.

#### SPECIFICATION


SPECIFIC	ATION			1			T		1				
MODEL		HLG-240H-12	HLG-240H-15	HLG-240H-20	HLG-240H-24	HLG-240H-30	HLG-240H-36	HLG-240H-42	HLG-240H-48	HLG-240H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT	16A	15A	12A	10A	8A	6.7A	5.72A	5A	4.45A			
	RATED POWER	192W	225W	240W	240W	240W	241.2W	240.24W	240W	240.3W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p			
	VOLTAGE ADJ. RANGE Note.6	11.2 ~ 12.8V	14 ~ 16V	18.6 ~ 21.4V	22.4 ~ 25.6V	28 ~ 32V	33.5 ~ 38.5V	39 ~ 45V	44.8 ~ 51.2V	50 ~ 57V			
OUTPUT	CURRENT ADJ. RANGE	Can be adjusted by internal potentiometer A type and C type only											
	CURRENT ADJ. RANGE	8 ~ 16A	7.5 ~ 15A	6 ~ 12A	5 ~ 10A	4 ~ 8A	3.3 ~ 6.7A	2.86 ~ 5.72A	2.5 ~ 5A	2.23 ~ 4.45A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION Note.8	±2.0%	$\pm 1.5\%$	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.9	1000ms,80ms	s/115VAC 5	500ms,80ms/2	30VAC at full I	oad							
	HOLD UP TIME (Typ.)	15ms at full lo	ad 230VAC	/115VAC									
	VOLTAGE RANGE Note.5	90 ~ 305VAC	127 ~ 43	1VDC									
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	TOTAL HARMONIC DISTORTION	THD< 20% wh	nen output loa	ding≧ 50% at	115VAC/230\	/AC input and	output loading	≥75% at 277	VAC input				
INPUT	EFFICIENCY (Typ.)	90%	90%	91.5%	92.5%	92.5%	92.5%	92.5%	93%	93.5%			
INPUI	AC CURRENT (Typ.)	4A / 115VAC 2A / 230VAC 1.2A / 277VAC											
	INRUSH CURRENT (Typ.)	COLD START 75A(twidth=570/zs measured at 50% Ipeak) at 230VAC											
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 4 units (circuit breaker of type C) at 230VAC											
	LEAKAGE CURRENT	<0.75mA/277VAC											
		95~108%											
	OVER CURRENT Note.4	Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed											
PROTECTION				23.5 ~ 27.5V		33 ~ 39V	43 ~ 49V	48 ~ 54V	55 ~ 63V	60 ~ 67V			
	OVER VOLTAGE	Protection type: Shut down and latch off o/p voltage, re-power on to recover											
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH	non-condensir	ng									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%°C (0~50°C)											
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
		UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750(type"HL"), CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independen											
	SAFETY STANDARDS Note.7	(except for HLG-240H C type), UL60950-1, UL8750, TUV EN60950-1, IP65 or IP67, J61347-1, J61347-2-13 approved											
SAFETY &	WITHSTAND VOLTAGE	, ,	• • • • • • • • • • • • • • • • • • • •				, , , , , , , , , , , , , , , , , , , ,	,,,,					
EMC	The state of the s												
	EMC EMISSION	,		N55022 (CISPF			lass C (≥50%	load) : FN610	00-3-3				
	EMC IMMUNITY	·		2,3,4,5,6,8,11,									
	MTBF	207.9K hrs mi		3K-217F (25°C	,	ooz i, iigiit iiidt	aoti y iovoi (ouis	go 11(v), onton	iu D				
OTHERS	DIMENSION			HLG-240H-Bla	·	51*68*38.8mm	(L*W*H)(HLG	-240H-C)					
JENO	PACKING		, ,,	JFT(HLG-240-E	<u>, , , , , , , , , , , , , , , , , , , </u>	2. 00 00.011111	,,(0						
NOTE	All parameters NOT special  Ripple & noise are measure  Tolerance : includes set up  Please refer to "DRIVING N	ly mentioned a ed at 20MHz of tolerance, line METHODS OF	re measured at bandwidth by regulation and LED MODULI	at 230VAC inposed using a 12" to dispose the dispose t	ut, rated load visted pair-wire on.	e terminated w	ith a 0.1uf & 4		pacitor.				
	<ul><li>5. Derating may be needed ur</li><li>6. A type and C type only.</li></ul>	I under low input voltages. Please check the static characteristics for more details.											

- A type and C type only.
  Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18.
  Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
  The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 10. Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently

## 240W Single Output Switching Power Supply HLG-240H-xx ADM series

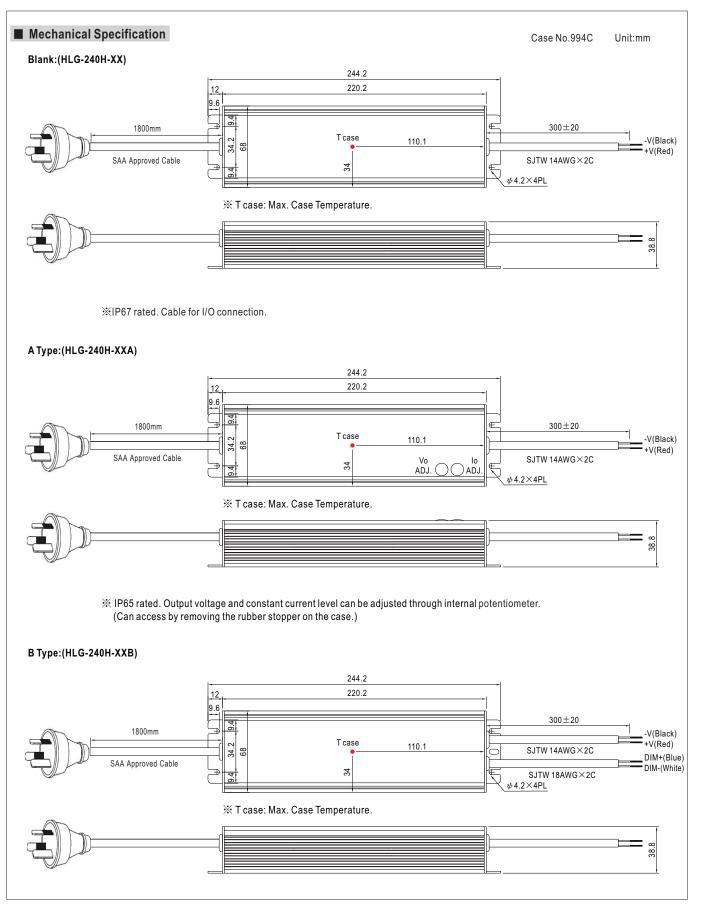

# 240W Single Output Switching Power Supply $HLG-240H-xx\square ADM$ series

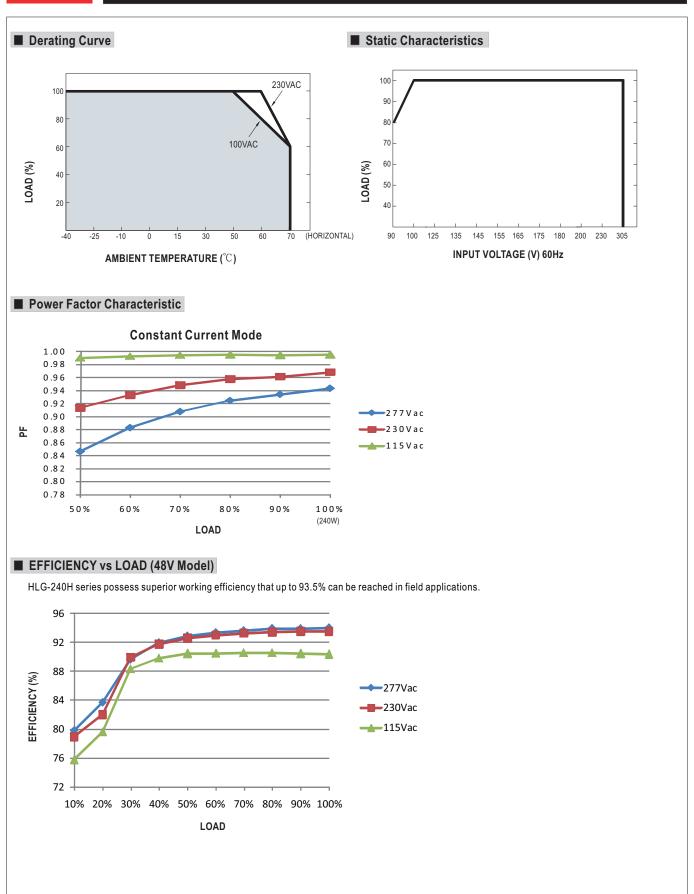




#### ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

Typical LED power supply I-V curve

#### ■ DIMMING OPERATION (for B-type only)



- 💥 Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- \* Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K $\Omega$	20KΩ	$30 \mathrm{K}\Omega$	<b>40K</b> Ω	50K $\Omega$	$60 \text{K}\Omega$	<b>70K</b> Ω	$80$ K $\Omega$	90KΩ	100KΩ	OPEN
value	Multiple drivers (N=driver quantity for synchronized dimming operation)	10K Ω/N	20K Ω /N	30K Ω/N	40K Ω /N	50K Ω/N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω/N	
Percentag	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

X 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

3KHz 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- \*\*Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- \*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

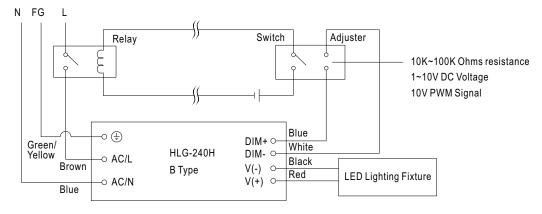

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.




# 240W Single Output Switching Power Supply $HLG-240H-xx\square ADM$ series

### ■ WATERPROOF CONNECTION


O Waterproof connector

 $Waterproof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-240H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)						
M12	000	000					
IVI 12	4-PIN	5-PIN					
	5A/PIN	5A/PIN					
Order No.	M12-04	M12-05					
Suitable Current	10A max.	10A max.					

Pin Configuration (Female					
$\odot$					
2-PIN					
12A/PIN					
M15-02					
12A max.					



### O Cable Joiner

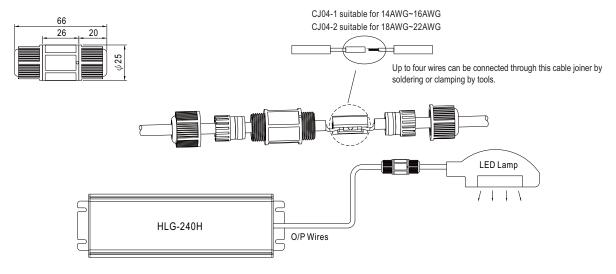

%CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No. : CJ04-1, CJ04-2.

#### 

