

# LTECH



## LED Receiver RF 4x5A - T4-CV

### Datasheet

[www.ltech-led.eu](http://www.ltech-led.eu) | ©2019 | Ltech Europe | All Rights Reserved.

## Technical Specs

### Electronics

LED Output Current (max per o 5A	
Current max.	20A
Power Supply	Not applicable
LED outputs	4
LED Output Voltage	5~24 V
Output power	100W @ 5V, 240W, 480W @ 24V

### Control Characteristics

Output	PWM-CV
Dimming Protocol	RF
Dimming Range	0~100%
Remote Distance	30m

### Wiring Specifications

Wire type	2,5mm2
Wire Strip Length	5mm

### Protection

Reverse Polarity	Yes
LED Output Short	Yes
Overload	Yes
Restart after protection	Yes

### Environmental

Ingress protection	IP20
Operating temperature	-30 ~ 55 °C

## Regulations



### Approvals

CE EMC	✓
FCC	FCC Part 15:2013
RoHS2	✓




## Technical Drawings

### 1. Product Size:

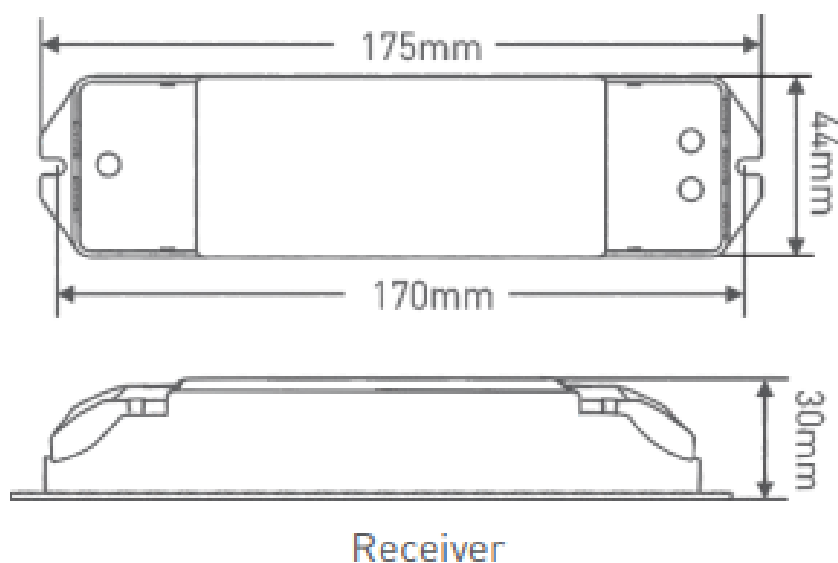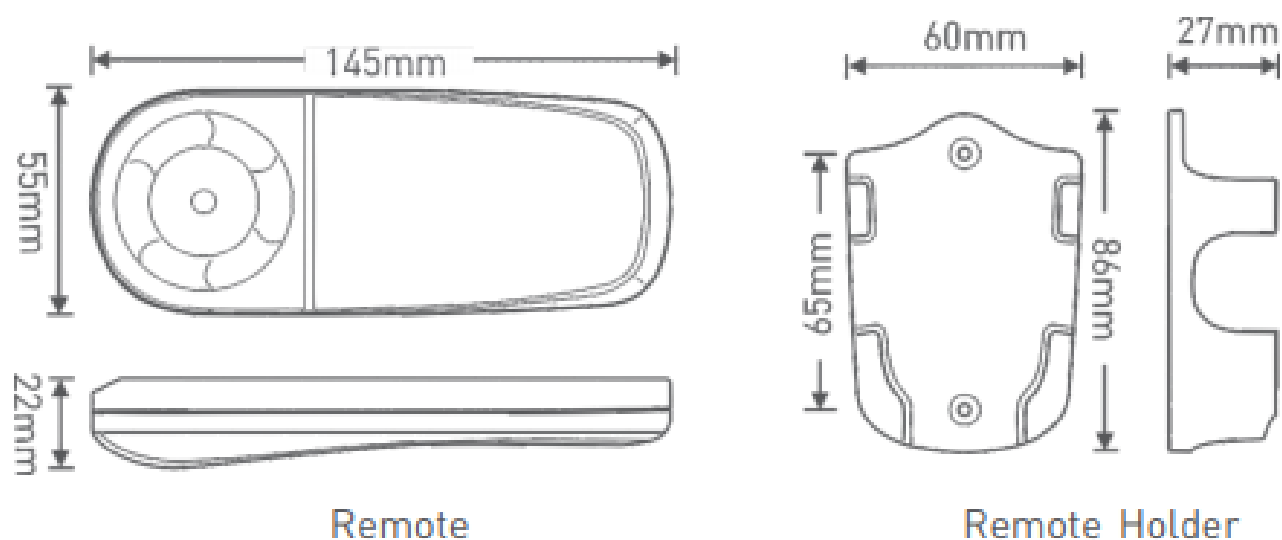

## Wiring Diagrams

### 8. Wiring Diagram:

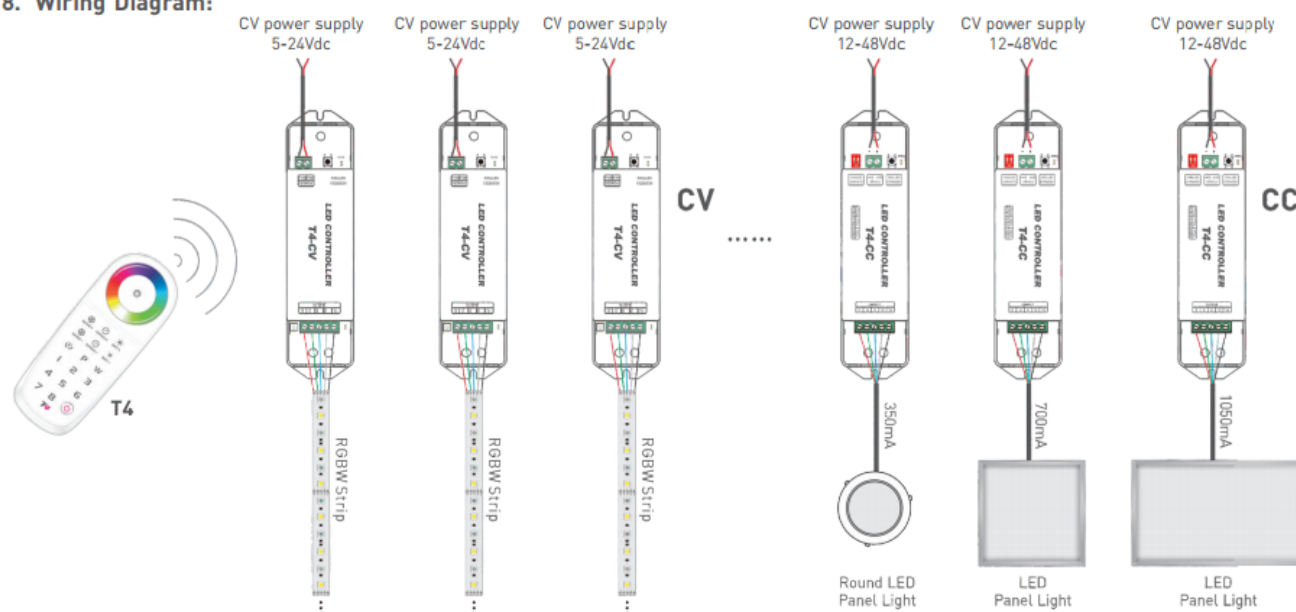

## Order information

Code	Description
22563	LED Receiver RF 4x5A - T4-CV

## Related Products

Product name
LED Remote RF Touch 4 RGBW - T4 <a href="#">See Online</a>

