

ENERGIZER SERIES UNIVERSAL 100 W, 24 VDC POWER SUPPLY



Specifications

SKU P-OH100-24-AU
Warranty 10-year product/5-year limited labor

Performance


Voltage range 170~264 VAC or 240~374 VDC
AC current Max. 0.73 A
Input frequency 47~63 Hz
Power factor ≥ 0.90 / 230V (at full load)
Output voltage DC 24V
Current range 0~4.17 A
Output power 100 W

Safety

Over current protection 105~140% of rated output power
Short circuit protection Hiccup mode, auto-recover
Other protection Over-voltage/over-load/short circuit
Safety standards Compliance to EN61347-1,
EN61347-2-13, IP67 waterproof rating,
GB195101.1, GB19510.14



Dimensions

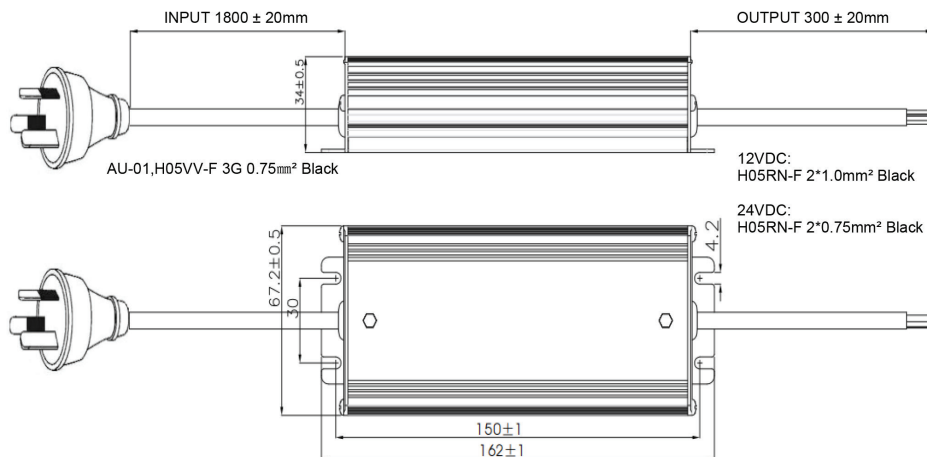

Environmental

IP rating IP67
Environmental suitability Wet, damp, dry
Operating temperature -25° C~+50° C
Storage temp. and humidity -25° C~+75° C, 5~95% RH
Relative humidity 10~90% RH, non-condensing



Sales & Support

PH 02 9517 3222 | E sales@bounced.com.au
www.bounced.com



Proudly distributed by
BOUNCE LED